

INDASH by PANAVISE®

75107-313

Page 1 of 2

MOUNTING LOCATION:

Right side of radio/display J R

TOOLS REQUIRED:

Dash Tool, Hook Tool

Phillips Screwdriver

PARTS INCLUDED:

(1)S7-2055, (1)S7-1932(75001)

(2)-A-#8x9/16" Needle Pt Screw

(2)-O- 8/32" Acorn Nuts, Tape

CELL PHONE & MEDIA MOUNT INSTALLATION INSTRUCTIONS

PART#: 75107-313

MFG: FORD

MODELS & YEARS:

F-150 2013-2014

W/O Console (Pg.1)

W/ Console (Pg.2)

With or Without NAV Screen

** ADVISEMENT **

Read instructions completely prior to starting installation. All InDash Mounts are designed so that after installation, phone is facing normal driver position for left-hand drive vehicles. This mount is not designed to be used in foreign countries with right-hand drive vehicles. Use extreme care when working around the plastic components on the dash. Excess force, can cause breakage of the plastic components.

STEP #1: **With console:** Try to install the same as below. If unable, see page 2. **Without console start here:** With Dash tool partially release the left side of the bezel to right of the Radio, that has the air vents, power outlet, and cubby. Pry with Dash Tool starting at the edge to the left of the cubby to release (1 or 2) clips. Continue up the edge to release as many left side clips as possible. Do not need to remove the bezel completely from the bottom. Just enough to get InDash Mount in place. See picture. **NOTE: You can not remove the right side air vent assembly You would need to remove the air bag assembly first, which is not necessary to install the InDash by PanaVise Mount.**

STEP #2: **Install supplied tape in the location shown on the picture, and trim to fit.** Place the InDash by PanaVise Mount to the left of the power outlet cavity, and it straddles the clip slot and leaves space for the clip to be inserted all the way. Install the (2) screws into the dash with the Phillips Screwdriver.

STEP #3: Snap the bezel back in place securely. Install the Top part of the InDash by PanaVise Mount (75001) with the (2) Acorn nuts.

INSTALLATION IS NOW COMPLETE. ENJOY YOUR NEW INDASH by PANAVISE MOUNT.



Showing method of holding open bezel to install mount.



Bottom part of InDash installed. Notice clip location.



InDash installed showing location w/NAV



InDash installed showing location w/Radio



Tape location install.



01-31-14

INDASH by PANAVISE®

75107-313
Page 2 of 2

MOUNTING LOCATION:

Right side of radio/display JR

TOOLS REQUIRED:

Dash Tool, Hook Tool

Phillips Screwdriver

PARTS INCLUDED:

(1)S7-2055, (1)S7-1932(75001)

(2)-A-#8x9/16" Needle Pt Screw

(2)-O- 8/32" Acorn Nuts, Tape

W/console start here: .

STEP#1: Remove the front panel to console finish panel, releasing (2) clips. Remove the shifter console top by lifting up from the back to release the top as a complete unit. Tilting all the way up towards the front of the dash and lift off, releasing (4) total clips, set aside.

STEP#2: Remove the left and right side lower front finish panel pulling out from the back of the panel to release (2) clips, and pull to the back to release the panel.

STEP#3: Remove the console storage box cover, by opening cover and remove the (3) lower Torx T30 screws, set cover aside. Lift up on the back of the console cover at rear cup holders lifting up to release (4) clips.

STEP#4: Move the seats forward and remove the (2) 5/16 floor console rear bolts, move the seats rearward. Remove the (2) 5/16 (8mm) screws at the front of the console.

STEP#5: Move the floor console rearward to be able to get at the Right Hand air vent bezel lower 9/32 (7mm)screw. Completely remove the console top bezel by releasing (2) more clips at the front of the bezel.

STEP #6: Install supplied protective tape on the mount in the location shown on the picture, and trim off excess. See page 1 for picture of tape in place.

STEP #7: Place the InDash by PanaVise Mount to the left of the power outlet cavity, and it straddles the clip slot and leaves space for the clip to be inserted all the way. Install the (2) screws into the dash with the Phillips Screwdriver.

STEP #8: Snap the bezel back in place securely. Install the Top part of the InDash by PanaVise Mount (75001) with the (2) Acorn nuts.

STEP#9: Replace all parts in reverse order. NOTES: Install console top bezel then slide console forward to snap back in place.

CELL PHONE & MEDIA MOUNT INSTALLATION INSTRUCTIONS

PART#: **75107-313**

MFG: **FORD**

MODELS & YEARS:

F-150 2013-2014

**W/O Console (Pg.1), W/ Console (Pg.2)
With or Without NAV Screen**

** ADVISEMENT **

Read instructions completely prior to starting installation. All InDash Mounts are designed so that after installation, phone is facing normal driver position for left-hand drive vehicles. This mount is not designed to be used in foreign countries with right-hand drive vehicles. Use extreme care when working around the plastic components on the dash. Excess force, can cause breakage of the plastic components.



Console finish panel removed



Console cover 3 screws




Console top bezel screws



Final Install Picture w/oNAV



Bottom piece InDash Mount in place

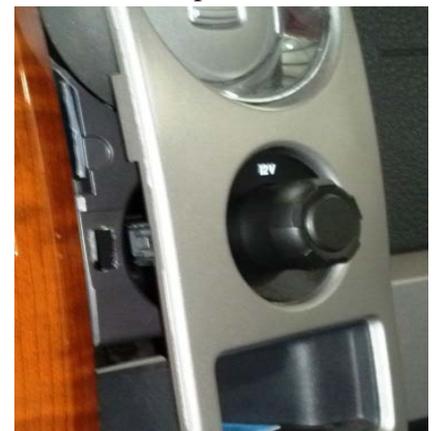

Console top bezel screws

01-31-14

